### The Acoustics of Woodwind Musical Instruments

Joe Wolfe

Postal: School of Physics University of New South Wales Sydney, New South Wales 2052 Australia

> Email: J.Wolfe@unsw.edu.au

The oldest known instrument family produces a wide range of tone colors and pitch using a range of interesting physics.

#### Introduction and Overview

Woodwind instruments have been played by humans, possibly including Neanderthals, for more than 40,000 years. Tubular pieces of bone, pierced with holes, and similarly shaped fragments carved from mammoth ivory have been discovered in caves in Europe; they are flutes, perhaps end-blown like a Japanese shakuhachi (Atema, 2014). Artificial musical instruments may be even older, but those made of perishable materials, including possibly drums, lyres, and didgeridoos, cannot compete archaeologically.

Woodwind instruments are classified by the sound source: air-jet instruments (e.g., flutes; Figures 1a and 2), single-reed instruments (clarinet, saxophone; Figures 1a and 3), or double reeds (oboe, bassoon; Figure 1a). Because of their diversity, the woodwind family provides a wide range of timbre, and orchestral composers often contrast their tone colors by passing a theme between different woodwind instruments (see examples at www.phys.unsw.edu.au/jw/AT). Beyond orchestras, woodwinds from folk traditions extend the timbre range further. Organ pipes (Angster et al., 2017) are also arguably woodwinds; they are excited either by an air jet or a single brass reed.

Like brass instruments (Moore, 2016), woodwind instruments convert energy in the steady flow of high-pressure air from the lungs into that of oscillations and sound waves. Also like brass, woodwinds have a sound source whose properties are strongly nonlinear. For brass, the source is the player's lips; for woodwinds, it is either an air jet or one or a pair of reeds. This source interacts with a resonator (largely linear), which is usually an acoustic duct, called the bore. In woodwinds, the effective length of the duct is varied when tone holes in its wall are opened or closed by the player. Usually, the instrument plays at a frequency near one of the duct resonances. Under the player's control, interactions between source and resonator determine pitch, loudness, and timbre.

The player's mouth provides air with a pressure of typically a few kilopascals and a flow rate of tenths of a liter per second, both varying with instrument, loudness, and pitch; this gives an input power of ~0.1 to a few watts. Oscillations of the air jet or reed modulate airflow into the bore, where resonant standing waves in turn produce fluctuating flow or pressure at the mouthpiece. These, in turn, control the input, a process called auto-oscillation discussed in Sound Production with an Air Jet and Sound Production with Reeds. Only a small fraction (order of 1%) of the input energy is radiated as sound from any open tone holes and from the remote end. Most of the input energy is lost as heat to the walls. This inefficiency is fine, however; players typically input a few hundred milliwatts, and an output of even a few milliwatts can produce about 90 dB at the player's ears. Most woodwinds are not as loud as brass. However, the piccolo, whose playing range includes the ear's most sensitive range, is readily heard above the orchestra.



Figure 1. a: Common orchestral woodwinds in descending order of pitch (from bottom): piccolo, flute, oboe, its larger version the cor anglais, clarinet, and bassoon. b: A flute head joint. A jet of air leaves the player's lips and crosses the open embouchure hole to the edge on the far side. c: The clarinet mouthpiece is almost closed by the reed. Side (d) and end (e) views of double reeds of the oboe, cor anglais, and bassoon.



Figure 2. a: Alto recorder. b: Japanese shakuhachi is blown longitudinally, with the player's chin covering most of its open end. c: Chinese dizi is a transverse flute whose unusual feature is the thin membrane (arrow) stretched over one hole in the wall. The membrane's nonlinear pressure-volume curve transfers power from low to high harmonics, giving it a brighter sound. d: Panpipes have a resonant duct for each note; each duct is closed at the remote end. e: Instead of a duct, the ocarina has a Helmholtz resonator. The air inside acts as a spring, and the tiny masses of air in open tone holes act, in parallel, as vibrating masses on that spring.

# The Bore, Its Resonances, and Its Impedance Spectrum

The ducts of the larger clarinets, saxophones, and bassoon are bent to make tone holes and keys easier for the player to reach. These bends have only a modest acoustical effect. For most flutes and the clarinet, much of the duct is approximately cylindrical, whereas for the oboe, saxophone, and bassoon, the duct is nearly conical.

Let's begin by considering a completely cylindrical bore (Figure 4), open to the air at both ends, a case approximated



Figure 3. Tenor (top) and soprano (bottom) saxophones and most modern flutes are made of metal but are called woodwinds. Does the material make a difference? Not much per se, is the usual answer from acousticians. However, different manufacturing techniques and material properties lead to slightly different bore geometries. These plus different surface texture and porosity can have different acoustic effects.

by the flute (**Figure 1a**) or the hybrid instrument in **Figure 5**, **bottom**. Inside the bore, the acoustic pressure can vary significantly, positive or negative. At the open ends, however, the acoustic pressure is small; the total pressure is close to atmospheric. So, if we look for resonant modes of oscillation in the bore, the boundary condition at both ends is a node for pressure and freedom for large flows in and out. The mode diagrams in **Figure 4** plot acoustic pressure (**red**) and acoustic flow (**blue**) against position along the bore. The diagram in **Figure 4**, **top left**, shows that half a sine wave fits the bore with a pressure node near each end, allowing a lowest mode whose wavelength ( $\lambda$ ) is roughly twice the length (L) of the pipe, say  $\lambda_1 \cong 2L$ .

From its open embouchure hole to the other open end, the nearly cylindrical flute in **Figure 1a** has a length of 0.63 m. The frequency  $f_1 = c/\lambda \cong c/2L = 270$  Hz, where c is the speed of sound. This is a little higher than its lowest note, B3, at 247 Hz, played with all the tone holes closed. The difference should not surprise us because the instrument is neither exactly cylindrical nor completely open at the mouthpiece end.

Considering the five mode diagrams at **Figure 4**, **left**, we see that the zero-pressure boundary conditions near the ends enclose, respectively,  $\frac{1}{2}$ , 1,  $\frac{1}{2}$ , 2, and  $\frac{2}{2}$  wavelengths. Using n for the mode number, the wavelengths and frequencies are thus approximately

$$\lambda_n \cong 2L/n$$
 so  $f_n = c/\lambda_n \cong nc/2L$  so  $f_n = nf_1$  (1)

Frequencies in the ratio 1:2:3, and so on, make the harmonic series. With a flute whose lowest note is C4 (262 Hz), a player can change the air-jet speed and length, thus exciting the bore to vibrate at frequencies  $nf_1$ , producing the notes with




Figure 4. Resonant modes in cylindrical ducts of length L. Red, acoustic pressure; blue, acoustic flow. The open-open pipe (top left) has, at both ends, pressure nodes and flow antinodes. When one end is closed (top right), this boundary condition permits no acoustic flow and allows an antinode in pressure. The longest wavelength ( $\lambda$ ; lowest frequency) modes are at top. See www.phys.unsw.edu.au/jw/ *AT* for more details.



Figure 5. Hybrid instruments, used as lecture demonstrations. Many people are surprised that the clarinet mouthpiece on a flute (top) plays and sounds like a clarinet and that the flute mouthpiece on a clarinet (bottom) plays and sounds like a flute. See videos at www. phys.unsw.edu.au/jw/AT.

 $f_1 = (C4), 2f_1 = (C5), 3f_1 = (G5), 4f_1 = (C6), 5f_1 = (E6), 6f_1 = (C6), 6f_1$ (G6), and 7f, (a note between A6 and A#6), all without moving the fingers (see sound files and video at www.phys.unsw. edu.au/jw/AT).

A further important point is that a nonsinusoidal periodic sound, with period  $T = 1/f_1$ , contains harmonics with frequencies  $nf_1$ . So, for a low note on the instrument operating at  $f_1$ , the resonances at  $2f_1$ ,  $3f_1$ , and possibly higher multiples help radiate power at these upper harmonics of the sound and contribute to making the timbre brighter.

A clarinet is also roughly cylindrical but, unlike a flute, it is almost completely closed at the mouthpiece by the reed (Figure 1c). Figure 4, right, shows the modes; this bore can accommodate 1/4, 3/4, 5/4, and so on, wavelengths

$$\lambda_n = 4L/(2n-1)$$
 so  $f_n = c/\lambda_n = (2n-1)c/4L$  so  $f_n = (2n-1)f_1$  (2)

So, with the same length, the  $f_1$  of an ideal closed-open, cylindrical tube is half that of the open-open tube so it plays an octave lower. Because of its bell and a flare leading to it, the clarinet does not play a full octave lower than the flute. The clarinet's lowest note is D3 or C#3 (139 Hz) compared with C4 or B3 (247 Hz) for the flute. The available higher modes for an ideal closed-open cylinder have frequencies 3, 5, or 7 times that of the lowest. One consequence is that, for the low notes on a clarinet, the first few even harmonics are substantially weaker than the adjacent odd harmonics.

The different conditions at the mouthpiece have another important consequence. A flutist can play an octave of notes using the first resonance and different effective lengths for each note. Then, because its resonances have  $f_2 = 2f_1$ , the flutist can play notes in a second octave using mainly the same fingerings but producing a faster jet. For the clarinetist, the second mode has  $f_2 = 3f_1$ , so the clarinetist is on the 12th note of a diatonic scale when the clarinetist returns to similar fingerings.

The bores of the oboe, bassoon, and saxophone are not cylindrical but are mainly conical. For axial waves in a cone, the cross section varies as one over the square of the distance from the apex, comparable with isotropic, spherical radiation. Consequently, the standing waves are not simple sine and cosine functions as in Figure 4. For a complete, open cone of length L, the solutions to the wave equation can form a complete harmonic series, with  $nc/2L = f_n = nf_1$ . These are the same frequencies as in an open-open cylinder of the same effective length. Of course, no instrument is a complete cone; that would leave nowhere for air to enter. Simply truncating a cone gives resonances that are inharmonic. However, harmonicity is approximately restored if the truncated apex is replaced by a mouthpiece having an equal effective volume. (That effective volume includes an extra volume representing the compliance of the reed.)

#### **Acoustic Impedance**

The acoustic response of the instrument bore is quantified by its acoustic impedance spectrum, Z(f), the acoustic pressure at the mouthpiece divided by the acoustic current into the mouthpiece and measured in acoustic megohms or MPa·s·m<sup>-3</sup>. Figure 6 shows the magnitude of the measured impedance spectra Z(f) for 5 ducts having the same effective length of about 33 cm. In the spectrum for the cylinder (**Figure 6, bottom**), the minima in *Z* (largest flow for given pressure) correspond to the modes of the open-open pipe and the maxima to those of a closed-open pipe. The minima form a complete harmonic series with  $f_1$  near 520 Hz or about C5 (cf. Eq. 1), and the maxima form a series with  $f_1$ near 260 Hz (C4) and its odd multiples (Eq. 2).

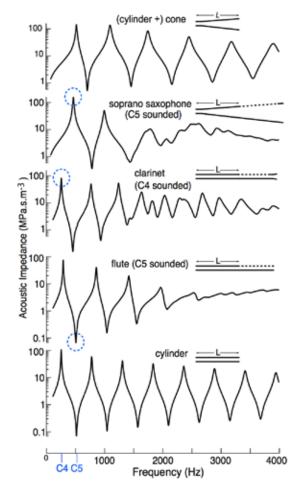


Figure 6. Semilog plots of measured amplitudes of acoustical impedance spectra (after Wolfe et al., 2010). The flute (second from bot*tom*) and saxophone (*second from top*) have fingerings that play C5 (523 Hz) and the clarinet (middle) plays C4 (262 Hz). In all cases, this means tone holes open in the bottom half of the instrument, as indicated in the schematics. The length of the cylinder (bottom) was chosen to put its first maximum at C4 and its first minimum near C5. The cylinder + cone has a first maximum at C5 (top). Thus, all five ducts have the same acoustical length (~L). In the flute, the disappearance of resonances around 4 kHz is an interesting effect that limits the range of the instrument. The small volume of air in the "dead end" beyond the embouchure hole (see Figure 1b) and the air in that hole constitute, respectively, the "spring" and mass of a Helmholtz resonator, which helps the instrument play in tune. At resonance, however, this short circuits the bore.

Above that of the cylinder is the measurement for a flute fingered to play C5. In the downstream half of the instrument, nearly all the tone holes are open, giving it an effective length corresponding approximately to its closed upstream half, as suggested by the schematic. The impedance minimum corresponding to C5 is circled.

At low frequencies, Z(f) for both the flute and clarinet (see Figure 6) resemble that of a simple cylinder; for these frequencies, the bore is effectively terminated near the first open holes. The clarinet, however, is almost closed at the mouthpiece by its reed so that it operates at maxima in impedance, and with a similar closed length of bore, it plays C4, an octave lower than the flute.

In **Figure 6**, top, is the measurement of a truncated cone, with a cylinder of equal volume replacing the truncation. Below is the measurement of a soprano saxophone, fingered to play C5 (trill fingering), with the fundamental impedance maximum circled. As for the clarinet, the reed requires large pressure variation for small flow and so plays at impedance maxima. The varied high-frequency behavior is discussed in Tone Holes, Register Holes, End Effects, and the Cutoff Frequency.

Returning to Z(f) for the cylinder, it is worth considering the time domain. Suppose we inject a short pulse of highpressure air at the input. It travels to the open end where, with the constraint of negligible acoustic pressure, it is reflected with a pressure phase change of  $\pi$  so that it becomes a pulse of negative pressure. After one round-trip of the 33-cm cylinder (about  $2L/c \sim 2$  ms), it returns to the input where this now negative pressure pulse makes it easy to inject the next pulse of air, whether it come from a device to measure Z or from the jet of a flute. So, a standing wave with a period of  $\sim$ 2 ms or a frequency of  $\sim$ 500 Hz produces a minimum Z and is can drive jet oscillating near that frequency.

But what happens instead if that returning negative pulse meets an input nearly closed by a clarinet reed? The negative pressure pulls the reed more closed, and the pressure pulse is reflected this time with no phase change. So, on its second round-trip, a negative pulse now travels down the bore where it is reflected at the open end with a  $\pi$  phase change and returns as a positive pulse. This time, it can push the reed open, let more air in, and thus amplify the next injected pulse. Thus, after two round-trips (about  $4L/c \sim 4$  ms), a positive pulse returns and the clarinet cycle repeats. An oscillation with frequency  $c/4L \sim 250$  Hz sees an impedance maximum, and the clarinet in Figure 6, middle, fingered to give an effective length of ~32 cm, plays C4, an octave below the flute with the same effective length. To understand the high-frequency behavior in Figure 6, we must understand more about tone holes.

## Tone Holes, Register Holes, End Effects, and the Cutoff Frequency

On keyboard instruments, the octave is usually divided into 12 equal semitones with a ratio of  $2^{1/12} = 1.059$ . The name octave means eight notes, and a major scale has seven unequal steps of 2, 2, 1, 2, 2, 2, 1 semitones; the scale of C major is played on just the white keys. Some woodwinds, including some baroque instruments, have no or few keys but a tone hole for each of the three long fingers on each hand, plus one for the left thumb. Suitably placed and sized holes allow a major scale to be played by lifting one digit at a time. After the seventh hole is opened, the player can switch from the first to the second resonant mode and begin the next register, repeating nearly the same fingerings.

At a low frequency, an open tone hole roughly approximates an acoustic short circuit, so the effective end of the bore is close to the first of the open tone holes. But the open tone hole is not exactly a pressure node (nor are the open ends of the pipes in **Figure 4**) because the air in and near the tone hole has inertia and must be accelerated by the sound wave. Consequently, the standing sound wave in the bore extends some distance past the first open tone hole. This effect increases with increasing frequency because the accelerating force for a given flow is proportional to frequency.

This effect allows a simple instrument with seven tone holes to "fill in" at least some of the remaining semitone steps in a chromatic scale using what players call cross fingering. If closing the first open tone hole lowers the pitch by two semitones, then a one semitone descent is achieved by leaving that hole open but closing the next one or more open holes. A fingering chart for a folk or baroque instrument provides examples.

To aid the production of the second register, a register hole is often used. For example, in the recorder (Figure 2a), the thumbhole is half-covered to provide a leak at a position where the first mode of oscillation would normally have substantial pressure. This weakens (and detunes) the first resonance and thus allows the second resonance to determine the pitch; the instrument plays its second register. (The frequency dependence of the inertial effect of air near tone holes means that, in a simple cylindrical bore, the same fingering would play somewhat less than an octave between two registers because the higher note would have a longer end effect. For this and other reasons, real instruments depart from cylindrical shape to improve intonation.)

At a sufficiently high frequency, the inertia of nearby air virtually seals the tone holes. So, above a value called the cutoff frequency  $(f_c)$ , the standing wave is little affected by open tone holes. For the clarinet in **Figure 6**, **middle**,  $f_c \sim 1.5$  kHz. Below  $f_c$ , the maxima (or minima) are spaced about 500 Hz apart and open tone holes determine the effective length of the bore. Above  $f_c$ , their spacing is roughly half this frequency because now the effective length is almost the entire bore, despite many open tone holes.

The cutoff frequency therefore limits the range of harmonic extrema in Z(f) and that limits which high harmonics are radiated efficiently. From baroque to romantic to modern instruments, more and successively larger holes raised  $f_c$ , contributing to increased power in higher harmonics and thus to increased timbral brightness and loudness.

From 1831 to 1847, Theobald Boehm revolutionized the flute. In his system, a dedicated tone hole opened for each ascending semitone. This meant that, for most fingerings, open holes were more closely spaced. The tone holes themselves were also larger, which required keys with pads to close them. A system of axles and clutches allowed the keys to be operated by eight fingers and one thumb and made playing all the keys relatively easy. The modern oboe, clarinet, and saxophone use some of his ideas.

Woodwinds have from thousands to millions of possible fingerings, of which only a small fraction are regularly used. Some are used only for trills and fast passages; others are used for subtle effects of pitch and timbre. Some fingerings produce two or more resonances that are not related as fundamental and harmonic. In this case, it is sometimes possible to play a superposition of notes at the different resonances, usually at a low sound level. These chords are called multiphonics in the modern solo and chamber music repertoire.

#### Sound Production with an Air Jet

The directional instability of a jet is demonstrated by a rising plume of cigarette smoke in still air. A jet deflects alternately in lateral directions and, after a while, sheds vortices. In the air-jet family, a narrow, high-speed jet is blown across a hole in the instrument toward a fairly sharp edge, the labium. In flutes, in the end-blown shakuhachi, and in panpipes, a high-speed jet emerges from between the player's lips. In the recorder and ocarina, a tiny duct called a windway guides the jet to the labium, making it easier to sound a note.








Figure 7. A musician plays a flute (a). Schlieren visualizations (b and c) of a jet blowing an experimental system with comparable geometry. A nozzle (top right) directs a jet across the embouchure hole toward the edge on the opposite side. In b, vertical deflections of the jet are seen. In c, vortices are shed on alternate sides. b and c courtesy of Benoit Fabre.

At the labium, downward deflections of the jet flow into the bore and upward deflections flow outside the instrument (Figure 7). With a suitable phase, standing waves with large flow amplitudes at the embouchure hole can entrap the jet in a feedback loop that causes it to be directed alternately into and outside the bore, thus maintaining the amplitude of standing waves in the bore and, in the starting transient, increasing it. The frequency of spontaneous deflections of the flute jet increases with jet speed, so successively faster jet speeds (typically tens of meters per second) excite successively higher resonances via a mechanism involving several subtleties (Fletcher and Rossing, 1998; Auvray et al., 2014). The different possibilities of lip aperture and jet speed, angle, height, and length give the player a range of parameters to control pitch, loudness, and timbre. For example, the pitch can be lowered significantly by rolling the instrument so that the lower lip occludes more of the embouchure hole, which increases the end effect. Turbulence produces a broadband signal (we can hardly call it "noise" in this context), which is an important part of timbre, especially for panpipes.

#### Sound Production with Reeds

In reed instruments, one or a pair of reeds are deflected by the varying pressure in the bore so as to modulate the airflow into the instrument. For clarinets and saxophones, the single reed is fixed on a mouthpiece (Figure 8) and bends like a cantilever to produce an oscillating aperture. Double-reed instruments (e.g., oboe and bassoon) have two symmetrical and curved blades that alternatingly flatten and curve to close and open the aperture (Figure 1, d and e). Clarinet and saxophone reeds are damped by the player's lower lip; the double reeds of the oboe and bassoon by both lips.

Consider the clarinet mouthpiece in **Figure 8**. Starting from zero, the blowing pressure (*P*) is gradually increased and the steady flow (U) past the reed is recorded. For now, neglect standing waves inside the mouthpiece. Initially, the airflow increases rapidly with increasing P; if all the air's kinetic energy is dissipated in downstream turbulence, we expect,

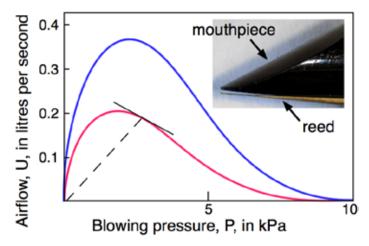

*Figure 8.* Sketch plots of airflow (U) past a clarinet reed as a function of blowing pressure (P). Inset: the mouthpiece. The player rests the reed on the lower lip, the upper teeth on the mouthpiece, and seals the lips around the mouthpiece to blow. **Blue curve**, lip force of 1 newton; red curve, lip force of 2 newtons. See text for details. After Dalmont and Frappé (2007).

from Bernoulli's equation,  $U \propto \sqrt{P}$ . At large P, however, the pressure closes the reed against the mouthpiece and the flow must go to zero and does so at lower *P* if we increase the lip force (Figure 8, red curve).

Consider a point on the right side of the curve, where U decreases with increasing P. For steady flow, the ratio P/Uis positive (inverse slope of dashed line); the mouthpiece is like an acoustic resistance, taking power out of the incoming high-pressure air. But for small acoustic signals,  $\partial P/\partial U$ (solid tangent) is negative; the mouthpiece is a negative resistance, inputting acoustic power to the clarinet. At the peak of the curves in Figure 6, the bore impedance is resistive, and if its resistance is larger than  $-\partial P/\partial U$ , then the reed inputs more acoustic power than the bore loses. The result is that a small signal at the fundamental frequency increases exponentially until the small signal approximation is no longer valid (Li et al., 2016). (This argument treats the inertia of the reed as negligible, which ceases to be even approximately true for high notes.) This simple model also explains the final transient. For example, if the reed is abruptly stopped by the tongue, the fastest possible decay rate is determined by the quality factor of the operating resonance.

Qualitatively, the double reeds of oboe, bassoon, and others share the same principles, although the geometry of the reed and its motion are both more complicated. The compliance and inertia of the reeds, the acoustic resistance in the narrow passage between them, and the Bernoulli force on the reed play larger roles, and the difference between the quasi-static and oscillating regimens is greater (Almeida et al., 2007).

#### Controlling the Output Sound

In Sound Production with an Air Jet, I mentioned some of the jet control parameters used by flutists. The argument immediately above shows the importance of blowing pressure and lip force(s) for reed players. Complicating life for players is that control parameters often affect several output properties. For example, blowing pressure and lip force both affect each of loudness, pitch, and spectrum.

Another aspect of control involves the player's vocal tract. A vibrating reed produces acoustic waves in both directions, and the acoustic force acting on the reed is approximately proportional to the series combination of the impedances of the bore and vocal tract. Especially at high frequencies, where the impedance peaks of the bore are weaker (Figure 6), resonances in the tract can affect pitch and timbre or control multiphonics. Tuning the tract resonances is necessary for playing the high range of the saxophone and for the famous clarinet portamento that begins Gershwin's Rhapsody in Blue (Chen et al., 2008, 2009).

The diversity and complexity of woodwinds and the range of interesting physical effects involved continue to engage the attention of researchers. Excellent technical treatments of woodwind acoustics are given by Nederveen (1998), Fletcher and Rossing (1998), and Chaigne and Kergomard (2016). My lab concentrates on the musician-instrument interaction (reviewed by Wolfe et al., 2015) and provides introductions with sound files and video (Music Acoustics, 1997).

#### Acknowledgments

I thank my colleagues, students, and the Australian Research Council for their support and Yamaha for instruments.

#### References

Almeida, A., Verguez, C., and Caussé, R. (2007). Quasistatic nonlinear characteristics of double-reed instruments. The Journal of the Acoustical Society of America 121, 536-546.

Angster, J., Rucz, P., and Miklós, A. (2017). Acoustics of organ pipes and future trends in the research. Acoustics Today 13(1), 10-18

Atema, J. (2014). Musical origins and the stone age evolution of flutes. Acoustics Today 10(3), 25-34.

Auvray, R., Ernoult, A., and Fabre, B. (2014). Time-domain simulation of flutelike instruments: Comparison of jet-drive and discrete-vortex models. The Journal of the Acoustical Society of America 136, 389-400.

Chen, J. M., Smith, J., and Wolfe, J. (2008). Experienced saxophonists learn to tune their vocal tracts. Science 319, 776.

Chen, J. M., Smith J., and Wolfe, J. (2009). Pitch bending and glissandi on the clarinet: Roles of the vocal tract and partial tone hole closure. The Journal of the Acoustical Society of America 126, 1511-1520.

Chaigne, A., and Kergomard, J. (2016). Acoustics of Musical Instruments. Springer-Verlag, New York.

Dalmont, J.-P., and Frappé, C. (2007). Oscillation and extinction thresholds of the clarinet: Comparison of analytical results and experiments. The Journal of the Acoustical Society of America 122, 1173-1179.

Fletcher, N. H., and Rossing, T. D. (1998). The Physics of Musical Instruments, 2nd ed. Springer-Verlag, New York.

Li, W., Almeida, A., Smith J., and Wolfe, J. (2016). The effect of blowing pressure, lip force and tonguing on transients: A study using a clarinet-playing machine. The Journal of the Acoustical Society of America 140, 1089-1100.

Moore, T. (2016). Acoustics of brass musical instruments. Acoustics Today 12(4), 30-37.

Music Acoustics (1997). From UNSW Sydney newt.phys.unsw.edu.au/music. Accessed September 27, 2017.

Nederveen, C. J. (1998). Acoustical Aspects of Wind Instruments. Northern Illinois University, DeKalb, IL.

Wolfe, J., Chen, J. M., and Smith, J. (2010). The acoustics of wind instruments - and of the musicians who play them. Proceedings of the 20th International Congress on Acoustics, ICA-2010, Sydney, Australia, August 23-27, 2010, pp. 4061-4070.

Wolfe, J., Fletcher, N. H., and Smith, J. (2015). Interactions between wind instruments and their players. Acta Acustica united with Acustica 101, 211-223.

#### **Biosketch**



Joe Wolfe is a professor of physics at the University of New South Wales (UNSW) Sydney, where he leads a lab researching the acoustics of the voice and musical instruments, especially woodwinds, brass, and didgeridoo. In the past, he has worked at Cornell University, Ithaca,

NY, at CSIRO (Australia's national research organization), and the École Normale Supérieure, Paris. He has received national and international awards for research and teaching. Outside of physics, he plays double reeds and the saxophone. His trumpet concerto has been performed several times, and his quartet has had concert performances on all continents except Antarctica.